

(51) International Patent Classification:

F02M 59/44 (2006.01) F04B 39/02 (2006.01)
F02M 63/00 (2006.01) F02M 59/10 (2006.01)

(21) International Application Number:

PCT/EP2018/062450

(22) International Filing Date:

15 May 2018 (15.05.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

102017000054112 18 May 2017 (18.05.2017) IT

(71) Applicant: ROBERT BOSCH GMBH [DE/DE]; Postfach
30 02 20, 70442 Stuttgart (DE).

(72) Inventors: MASTAI, Angela; Via Saverio Lioce 77,
70124 Bari (IT). DIAFERIA, Antonio; Via Roma, 63,
70033 Corato, Bari (IT). ROMITA, Cristina; Via Lorenzo
Perosi 27, 70132 Bari (IT).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PUMP UNIT FOR FEEDING FUEL TO AN INTERNAL-COMBUSTION ENGINE

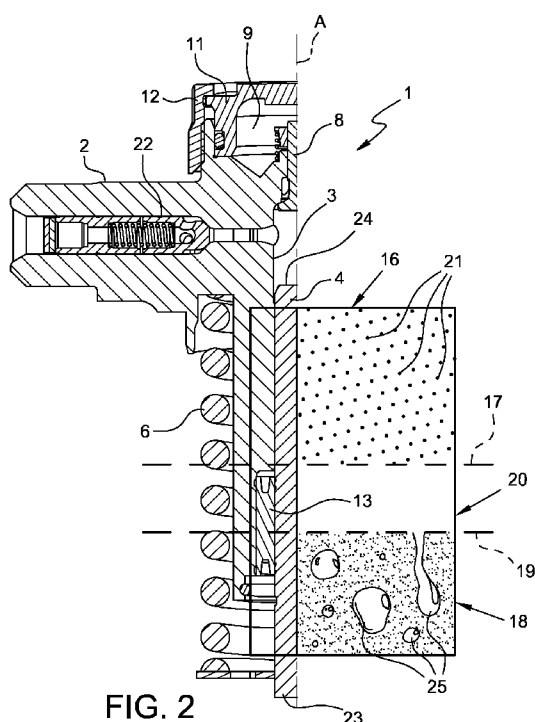


FIG. 2

(57) Abstract: A pump unit for feeding fuel, in particular diesel fuel, to an internal-combustion engine; the pump unit comprising a head (2) inside which a cylinder (3) is formed along an axis; a pumping piston (4) housed inside the cylinder and comprising a head portion (24) inside the cylinder and an opposite foot portion (23) projecting outside the cylinder; wherein the piston is slidable inside the cylinder in a reciprocating manner between a first position and a second position where the foot projects from the cylinder by a greater or smaller amount respectively; and wherein the outer surface of the piston comprises a portion (16) with a surface finish so as to have less friction and a greater lubricant-retaining capacity than the remainder of the outer surface of the piston; the portion extending along the axis between the head of the piston and a first intermediate point (17) in the first position of the piston, the first intermediate point being inside the cylinder.

- 1 -

5 Description

Title

PUMP UNIT FOR FEEDING FUEL TO AN INTERNAL-COMBUSTION ENGINE

10 The present invention relates to a pump unit for feeding fuel, preferably diesel fuel, to an internal combustion engine.

As is known, a pump unit for feeding fuel, preferably diesel fuel, to an internal combustion engine comprises a head which has, formed therein, at least one
15 cylinder housing the associated sliding pumping piston. One end of the pumping piston, in particular the inner end with respect to the pump unit, which projects from the cylinder and is called the piston foot, is connected to an actuator, usually a cam shaft, which performs the movement of the piston. A special spring is provided for keeping the piston foot pressed against the associated actuator.

20 Moving along the reciprocating cylinder, the piston performs an intake stroke, during which it draws fuel into the cylinder, and a compression stroke during which it compresses the fuel retained inside the cylinder. The cylinder portion where compression is performed is called the compression chamber and the other end of the piston, called piston head, is housed inside this chamber.

25 Generally, the feeding into cylinder occurs through a hole, or intake hole, while discharging of the compressed fuel occurs along a transverse hole or delivery hole. The external part of the head for collecting the fuel, which must be fed into

- 2 -

the chamber, is called the intake chamber which is closed externally by a special lid, or closure, which is sealingly fastened against the head. An intake valve and a delivery valve for regulating the correct flow of the fuel respectively from the intake chamber to the compression chamber and from the compression chamber to the engine are provided. Outside the head, the delivery valve is connected to the engine, preferably by means of a common header provided with a plurality of injectors.

The intake chamber is in communication with an intake duct for feeding the fuel drawn from the storage tank by means of a low-pressure pump, usually a gear pump. The pump unit also comprises filtering systems, for example ring filters at the inlet of the intake chamber, for protecting the components of the high-pressure pump from the impurities present in the fuel fed by the low-pressure pump.

Lubrication of the sliding piston inside the cylinder is ensured by means of the fuel itself which seeps between the piston and the cylinder from the compression chamber to the base of the cylinder, beyond which the piston foot interacts with the cam shaft. Since this cam shaft is lubricated by an oil bath, it is nowadays necessary to provide the base of the cylinder with a seal able to prevent contact between the underlying oil and the fuel which has seeped in and accumulated at the base of the cylinder.

Moreover, this fuel which has seeped in and accumulated at the base of the

- 3 -

cylinder must be periodically removed from the cylinder because its high temperature could damage the seal situated precisely at the base of the cylinder.

According to the prior art the seeped fuel which has accumulated at the base of the cylinder is again fed to the intake chamber. For this purpose a special channel, which connects the intake chamber to a chamber for storing the fuel at the base of the cylinder in the region of the seal, is formed in the cylinder head.

In order to prevent the risk of the piston becoming jammed inside the cylinder nowadays it is known to coat the piston with a layer of DLC (diamond like carbon).

In the light of this prior art, today there exists the need to provide an alternative solution which is able to prevent jamming of the piston inside the cylinder as well as prevent the infiltration of oil from the outside to the inside of the cylinder containing the fuel which is periodically transferred back to the intake chamber.

According to the present invention a pump unit for feeding fuel, in particular diesel fuel, to an internal combustion engine is provided. This pump unit comprises:

- a head inside which a cylinder extending along an axis A is formed;
- a pumping piston housed inside the cylinder and comprising a head portion

- 4 -

inside the cylinder and an opposite foot portion projecting outside the cylinder. As is known, the head of the piston is located in the region of the compression chamber and is fed by an intake valve which is in turn connected to an intake chamber. Again in a known manner, the foot of the piston is kept pressed against a cam shaft lubricated by an oil bath. During rotation of the cam shaft the piston slides inside the cylinder in a reciprocating manner between a first and a second position where the foot projects by a greater or smaller amount from the cylinder. These movements of the piston are referred to as "intake stroke", which terminates with the foot of the piston in a position fully extracted from the cylinder, and "compression stroke", which terminates with the foot of the piston in a position fully retracted towards the cylinder.

According to a first aspect of the invention the outer surface of the piston comprises a first surface-machined portion, namely with a first surface finish, so as to produce less friction with the cylinder and have a greater capacity for retaining lubricant, i.e. in the case in question part of the fuel which has seeped between piston and cylinder. These properties are to be regarded as being in relation to the remainder of the outer surface of the piston, but also the first portion itself prior to the surface treatment. The first portion extends along the axis A from substantially the head of the piston as far as a first intermediate point. This first intermediate point is situated always, i.e. even when the piston is fully extracted, inside the cylinder.

Advantageously this solution improves the mechanical interaction between piston

- 5 -

and cylinder precisely in the zone of contact where jamming may occur.

Preferably, following surface-machining, the first portion comprises a plurality of cavities in the form of micro dimples arranged in a matrix. According to an example of embodiment, these cavities may be formed by means of laser surface-machining and may have a diminishing progression, namely decreasing intensity, from the piston head towards the first intermediate point. Preferably the interaxial distance between the cavities is about 100-250 μ m. while the diameter and depth of each cavity is respectively about 30-150 μ m and about 2-10 μ m.

According to another aspect of the invention, which may complement or represent an alternative to the preceding aspect, the outer surface of the piston comprises a second surface-machined portion, namely with a second surface finish, so as to have a smaller lubricant-retaining capacity, namely so as to be substantially oil-repellent. Such properties are to be regarded as being in relation to the remainder of the outer surface of the piston, but also in relation to the second portion itself prior to the surface treatment. The second portion extends along the axis A between the foot of the piston and a second intermediate point. This second intermediate point is situated always, i.e. even when the piston is fully extracted, inside the cylinder.

Advantageously, therefore, the transportation of the cam shaft lubrication oil towards the inside of the cylinder where it could be mixed with the seeped fuel is prevented.

- 6 -

Preferably, following the surface machining, the second portion comprises the deposition of a coating layer which is configured to make the surface oil-repellent, and/or the formation in this second portion of superficial nanostructures also configured to reduce the oil droplet retention capacity. According to an example of implementation, these superficial nanostructures are formed by means of plasma or laser surface-machining. By way of example, the oil-repellent surface coating has a thickness of between 400 and 900 nm, while the nanostructures have a height of a few tens of nanometres.

According to two preferred alternative embodiments of the invention, the second intermediate point coincides with the first intermediate point, in other words a third portion of the piston without surface-machining is present between the first and second portions.

The first of the aforementioned two embodiments of the invention is functional for pumps not provided with particular seals at the inner end of the cylinder.

The second embodiment is instead able to cooperate with the aforementioned seal so that, when the piston is fully extracted, the second intermediate point is situated opposite the seal, whereas, when the piston is fully retracted, the second intermediate point is situated inside the cylinder beyond the seal.

Further characteristic features and advantages of the present invention will

- 7 -

become clear from the description below of a non-limiting example of embodiment thereof, with reference to the figures of the attached drawings, in which:

5 - Figure 1 is a schematic cross-sectional view of a portion of a pump unit for feeding fuel to an internal combustion engine;

10 - Figure 2 is a view of a portion of the pump unit according to Figure 1, which schematically shows various zones of the piston, provided with different surface-machined finishes, according to the present invention;

 - Figures 3 and 4 show schematic cross-sectional views of two different embodiments of the invention in different operating positions.

15 With reference to the list of figures indicated above Figure 1 is a schematic cross-sectional view of a constructional example of a pump unit for feeding fuel to an internal combustion engine. According to this example, the pump unit 1 comprises a head 2 inside which a cylinder 3 with an axis A for housing a sliding pumping piston 4 is formed. The head 2 also has, formed inside it, an intake duct
20 5 for feeding the fuel from a storage tank outside the pump to the cylinder 3 and a delivery duct 2 (visible in Figure 2) for discharging the fuel compressed by the cylinder 3.

An actuator device (not shown), for example a cam shaft, for performing the

- 8 -

reciprocating movement of the piston inside the cylinder 3 is provided at the inner end or foot of the piston 23. For this purpose the foot of the piston 23 projects outside the cylinder 3 and is pressed by means of a spring 6 against the cam shaft. The cam shaft is lubricated by an oil bath. At the opposite end, or head of the piston 24, the cylinder 3 is provided with a hole 7, arranged axially along the axis A, for housing an intake valve 8 which places the compression chamber 10 of the cylinder 3 in communication with an intake chamber 9 situated outside the head 2 and fed with the fuel via the intake duct 5. The intake valve 8 comprises a stem-type closing member which straddles the hole 7 and on one side projects into the compression chamber 10 and on the other side projects into the intake chamber 9. On the outside of the head 2, the intake chamber 9 is closed by a lid 11 pressed against the head 2 by a locking ring 12. Both the sealed connection of the lid 11 with the head 2 and the connection between the locking ring 2 and the lid 11 are known.

The pump unit 1 comprises a seal 13 at the inner end of the cylinder 3. This seal 13 has the purpose of stopping the downward flow of the fuel which has seeped between cylinder 3 and piston 4 and therefore defines inside the head 2 a storage chamber 14 for the seeping fuel. This seal 13 prevents moreover the return flow inside the cylinder 3 of the oil for lubrication of the cam shaft in contact with the foot of the piston 23. Preferably this storage chamber 14 has an annular form about the axis A.

As can be seen in Figure 1, an internal discharge channel 15 is formed inside the

head 2 and extends from the storage chamber 14 to the intake chamber 9.

Figure 2 is a view of a portion of the pump unit according to Figure 1, which schematically shows various zones of the piston, with different surface-machined finishes, according to an example of the present invention. Starting from the head 24 and moving downwards along the axis A towards the foot 23, the piston 4 has three portions arranged in series with different surface properties. In particular two of the three portions have different surface-machined finishes, while the third surface is simply a surface, which has not been further treated, according to the prior art. The first portion 16 extends substantially from the head 24 of the piston 4 as far as a first intermediate point 17. As schematically shown in Figure 2, in this first portion 16, the side surface of the piston 4 comprises a plurality of cavities 21 in the form of micro fissures or depressions arranged ordered in an matrix and having a diminishing extension from the head 24 of the piston 4 towards the first intermediate point 17. A third portion 20, without surface-machining, is provided in series with the first portion 16. A second portion 18 is provided in series with the third portion 20 and terminates at the foot 23 of the piston. As schematically shown in Figure 2, in this second portion 18 the side surface of the piston 4 comprises a coating layer provided in the form of superficial nanostructures. In Figure 2 oil droplets are schematically indicated by the reference number 25; these droplets, since they are no longer able to adhere to the piston, fall by means of gravity towards the foot of the piston.

Figure 3 shows in schematic form the piston 4, according to Figure 2, fully

- 10 -

extracted (left-hand side) and minimally extracted (right-hand side) from the cylinder 3. As can be seen in this example, the first intermediate point 17 connecting together the first portion 16 and third portion 20 is always situated inside the cylinder 3 and is never situated facing the seal 13 present at the end of the said cylinder 3. In this embodiment, the second intermediate point 19, which connects the third portion 20 to the second portion 18, is situated opposite the seal 13 in the position where the piston 4 is fully extracted and, inside the cylinder 3 beyond the seal 13, in the fully retracted position of the piston 4.

Figure 4 shows an alternative embodiment of the invention in which the seal 13 is not present and the piston 4 is not provided with the third portion 20. In this example, therefore, the first intermediate point 17 and the second intermediate point 19 coincide.

It is clear that the present invention described here may be subject to modifications and variations without departing from the scope of protection of the accompanying claims.

5 Claims

1. A pump unit for feeding fuel, preferably diesel fuel, to an internal combustion engine, the pump unit (1) comprising:

- a head (2) inside which a cylinder (3) extending along an axis (A) is formed;

10 - a pumping piston (4) housed inside the cylinder (3) and comprising a head portion (24) inside the cylinder and an opposite foot portion (23) projecting outside of the cylinder (3), the piston (4) being slidable inside the cylinder (3) in a reciprocating manner between a first position and a second position where the foot (23) projects from the cylinder (3) by a greater or smaller amount,
15 respectively;

wherein the outer surface of the piston (4) comprises a first portion (16) with a first surface finish so as to have less friction and a greater lubricant-retaining capacity than the remainder of the outer surface of the piston (4); the first portion (16) extending along the axis (A) between the head (24) of the piston (4) and
20 a first intermediate point (17) in the first position of the piston (4), the first intermediate point (17) being inside the cylinder (3).

2. Pump unit as claimed in Claim 2, wherein the first portion (16) comprises a plurality of cavities (21) in the form of micro dimples arranged in a matrix.

25

3. Pump unit as claimed in Claim 2, wherein the cavities (21) are formed by

- 12 -

means of laser surface-machining.

4. Pump unit as claimed in Claim 2 or 3, wherein the cavities (21) of the first portion diminish from the head (24) of the piston (4) towards the first intermediate point (17).

5. Pump unit as claimed in any one of the preceding claims, wherein the outer surface of the piston (4) comprises a second portion (18) with a second surface finish so as to have smaller lubricant-retaining capacity than the same portion before machining; the second portion (18) extending along the axis (A) between the foot (23) of the piston (4) and a second intermediate point (19) in the first position of the piston (4), the second intermediate point (19) being inside the cylinder (3).

6. Pump unit as claimed in Claim 5, wherein the second portion (18) comprises a coating layer provided in the form of superficial nanostructures.

7. Pump unit as claimed in Claim 6, wherein the superficial nanostructures are formed by means of plasma surface-machining.


8. Pump unit as claimed in Claim 5 or 6 or 7, wherein the second intermediate point (19) coincides with the first intermediate point (17).

9. Pump unit as claimed in Claim 5 or 6 or 7, wherein a third portion (20) of

- 13 -

the piston, which has not been surface-machined, is present between the first portion (16) and the second portion (18).

10. Pump unit as claimed in Claim 9, wherein the pump unit (1) comprises a seal (13) at the end of the cylinder (3) engaged with the foot (23) of the piston (4);
in the first position of the piston (4); in the first position of the piston (4) the second intermediate point (19) being opposite the seal (13), while in the second position of the piston (4) the second intermediate point is inside the cylinder (3) beyond the seal (13).

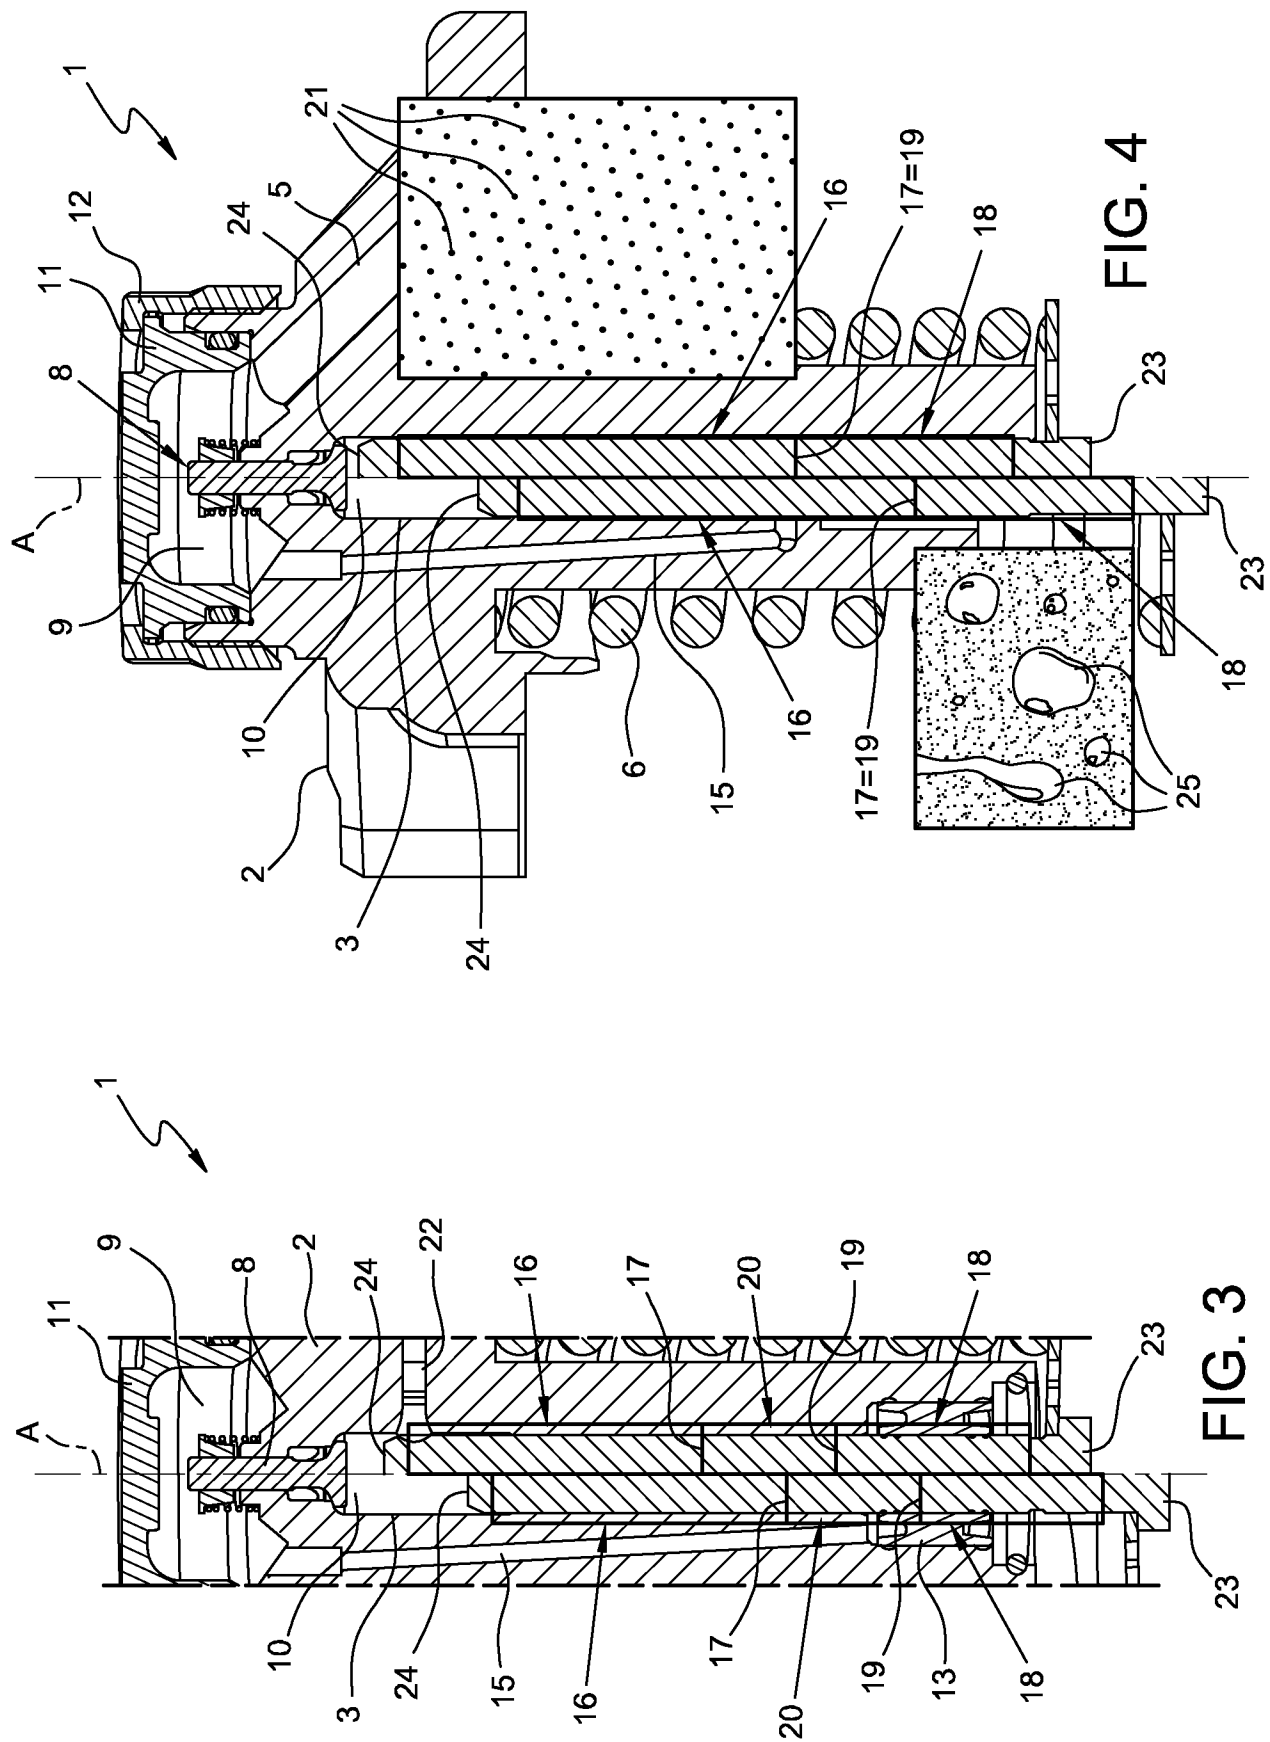

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/062450

A. CLASSIFICATION OF SUBJECT MATTER

INV. F02M59/44 F02M63/00 F04B39/02 F02M59/10
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F02M F04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2015/004189 A1 (EFI HIGHTECH AG [CH]) 15 January 2015 (2015-01-15)	1-5,8-10
Y	page 2, paragraph 6th-7th; figures page 13, paragraph 5th	6,7
Y	----- US 6 477 940 B1 (DANCKERT BERND [DE] ET AL) 12 November 2002 (2002-11-12) claims 25,29; figures	6,7
A	----- DE 102 59 955 A1 (BOSCH GMBH ROBERT [DE]) 15 July 2004 (2004-07-15) paragraph [0014]; figures	1
A	----- WO 2015/110242 A1 (BOSCH GMBH ROBERT [DE]) 30 July 2015 (2015-07-30) figures	1
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 May 2018

Date of mailing of the international search report

13/06/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Godrie, Pierre

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/062450

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 10 2005 061781 A1 (SCHAEFFLER KG [DE]) 28 June 2007 (2007-06-28) figures	1
A	----- US 2005/063835 A1 (BUETTNER ULRICH [DE] ET AL) 24 March 2005 (2005-03-24) paragraph [0024]; figures	6,7
A	----- DE 103 50 275 A1 (BOSCH GMBH ROBERT [DE]) 2 June 2005 (2005-06-02) abstract; figures	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2018/062450

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2015004189 A1	15-01-2015	EP 2824311 A1 WO 2015004189 A1	14-01-2015 15-01-2015
US 6477940 B1	12-11-2002	AT 226279 T EP 1066466 A1 US 6477940 B1 WO 9949209 A1	15-11-2002 10-01-2001 12-11-2002 30-09-1999
DE 10259955 A1	15-07-2004	DE 10259955 A1 WO 2004057177 A1	15-07-2004 08-07-2004
WO 2015110242 A1	30-07-2015	DE 102014201387 A1 WO 2015110242 A1	30-07-2015 30-07-2015
DE 102005061781 A1	28-06-2007	NONE	
US 2005063835 A1	24-03-2005	DE 10249818 A1 EP 1563185 A1 US 2005063835 A1 WO 2004040134 A1	13-05-2004 17-08-2005 24-03-2005 13-05-2004
DE 10350275 A1	02-06-2005	NONE	