

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 February 2012 (02.02.2012)

(10) International Publication Number
WO 2012/013956 A1

PCT

(51) International Patent Classification:

C04B 35/26 (2006.01) **H01L 41/187** (2006.01)
C04B 35/462 (2006.01) **H01L 41/24** (2006.01)
C04B 35/475 (2006.01)

(21) International Application Number:

PCT/GB2011/051356

(22) International Filing Date:

19 July 2011 (19.07.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1012637.3 28 July 2010 (28.07.2010) GB
1100696.2 17 January 2011 (17.01.2011) GB

(71) Applicant (for all designated States except US): **UNIVERSITY OF LEEDS** [GB/GB]; Clarendon Road, Leeds Yorkshire LS2 9JT (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BELL, Andrew, John** [GB/GB]; Institute for Materials Research, Houldsworth Building, University of Leeds, Clarendon Road, Leeds Yorkshire LS2 9JT (GB). **COMYN, Timothy** [GB/GB]; Institute for Materials Research, Houldsworth Building, University of Leeds, Clarendon Road, Leeds Yorkshire LS2 9JT (GB).

(74) Agent: **STUTTARD, Garry**; Tower North Central, Merion Way, Leeds Yorkshire LS2 8PA (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CERAMIC

(57) Abstract: The present invention relates to a ceramic comprising (or consisting essentially of) a solid solution containing Bi, K, Ti and Fe (and optionally Pb) which exhibits piezoelectric behaviour.



WO 2012/013956 A1

Ceramic

The present invention relates to a ceramic comprising (or consisting essentially of) a solid solution containing Bi, K, Ti and Fe (and optionally Pb) which exhibits piezoelectric behaviour.

Piezoelectric materials generate an electric field in response to applied mechanical strain. The effect is attributable to a change of polarization density within the material. The piezoelectric effect is reversible in the sense that stress or strain is induced when an electric field is applied to the material. These properties are deployed in piezoelectric sensors and actuators which are used widely in a number of specific applications and instruments. Examples of the use of piezoelectric materials include medical ultrasound and sonar, acoustics, vibration control, spark igniters and (more recently) diesel fuel injection.


The family of ceramics with a perovskite or tungsten-bronze structure exhibits piezoelectric behaviour. There are a number of examples of ceramics with a perovskite structure which are lead-containing. For example, lead zirconate titanate ($\text{Pb}[\text{Zr}_x\text{Ti}_{1-x}]\text{O}_3$ $0 < x < 1$) which is more commonly known as *PZT* exhibits a marked piezoelectric effect and is the most common piezoelectric ceramic in use today. However it has a maximum operating temperature of only about 200°C. WO-A-2006/032872 discloses the lead-containing perovskite compound $(\text{BiFeO}_3)_x - (\text{PbTiO}_3)_{1-x}$ which exhibits piezoelectric behaviour.

There is growing concern over the toxicity of lead-containing devices and this concern is reflected in environmental regulation and policy. As a result there is increasing interest in lead-free piezoelectric materials. Known lead-free piezoelectric materials are NaNbO_3 , BiFeO_3 , $(\text{Bi}_{1/2}\text{Na}_{1/2})\text{TiO}_3$, $(\text{Bi}_{1/2}\text{K}_{1/2})\text{TiO}_3$, BaTiO_3 , KNbO_3 and solid solutions such as $(\text{Bi}_{1/2}\text{Na}_{1/2})\text{TiO}_3 - (\text{Bi}_{1/2}\text{K}_{1/2})\text{TiO}_3 - \text{BaTiO}_3$, $(\text{Bi}_{1/2}\text{Na}_{1/2})\text{TiO}_3 - (\text{Bi}_{1/2}\text{K}_{1/2})\text{TiO}_3 - \text{BiFeO}_3$ (see Zhou *et al*, Mat. Chem. & Phys., 114, 2009, 832-836), $(\text{Bi}_{1/2}\text{Na}_{1/2})\text{TiO}_3 - (\text{Bi}_{1/2}\text{K}_{1/2})\text{TiO}_3$, $(\text{Bi}_{1/2}\text{K}_{1/2})\text{TiO}_3 - \text{BaTiO}_3$, $(\text{Bi}_{1/2}\text{Na}_{1/2})\text{TiO}_3 - \text{BaTiO}_3$, $(\text{Bi}_{1/2}\text{Na}_{1/2})\text{TiO}_3 - \text{BaTiO}_3 - \text{BiFeO}_3$ (see Nagata *et al*, Ferroelectrics, 229, Issue 1 May 1999, 273-278) and $(\text{K}, \text{Na})\text{NbO}_3$.

JP-2008-069051 discloses a piezoelectric ceramic containing $x(\text{Bi}_a\text{K}_{1-a})\text{TiO}_3 - (1-x)\text{BiFeO}_3$ and substantial proportions of non-perovskite ternary oxides such as $\text{Bi}_2\text{Fe}_4\text{O}_9$ and $\text{Bi}_3\text{Ti}_4\text{O}_{12}$. The highest Curie point was reported to be 480°C for the ceramic in which x is 0.3.

The present invention is based on the recognition that solid solutions of formula $x(\text{Bi}_a\text{K}_{1-a})\text{TiO}_3 - y\text{BiFeO}_3 - z\text{PbTiO}_3$ (such as $x(\text{Bi}_a\text{K}_{1-a})\text{TiO}_3 - (1-x)\text{BiFeO}_3$ (hereinafter $x\text{KBT} - (1-x)\text{BF}$)) which are substantially free of non-perovskite phases typically exhibit a high Curie point and/or excellent piezoelectric activity.

Thus viewed from a first aspect the present invention provides a ceramic comprising (*eg* consisting essentially of or consisting of) a solid solution of formula:



wherein $0.4 \leq a \leq 0.6$;

$0 < x < 1$;

$0 < y < 1$;

$0 \leq z \leq 0.5$; and

$x + y + z = 1$,

wherein the ceramic is substantially free of non-perovskite phases.

Typically the ceramic of the invention advantageously exhibits a Curie point in excess of 350°C but often 700°C or more.

Preferably the ceramic consists essentially of the solid solution. For example, the solid solution may be present in the ceramic in an amount of 50wt% or more (*eg* in the range 50 to 99wt%), preferably 75wt% or more, particularly preferably 90wt% or more, more preferably 95wt% or more.

Preferably the ceramic further comprises one or more perovskite phases. Particularly preferably the (or each) perovskite phase is selected from the group consisting of $(\text{Bi}_a\text{K}_{1-a})\text{TiO}_3$, BiTiO_3 , KTiO_3 , BiFeO_3 and PbTiO_3 . The (or each) perovskite phase may be present in an amount of 75wt% or less, preferably 50wt% or less, particularly preferably 25wt% or less, more preferably 5wt% or less. The (or each) perovskite phase may be present in a trace amount.

The non-perovskite phases may be mixed metal phases of two or more (*eg* three) of Bi, K, Ti, Fe or Pb. Examples include Bi_2O_3 , K_2O , $\text{Bi}_2\text{Fe}_4\text{O}_9$ and $\text{Bi}_3\text{Ti}_4\text{O}_{12}$.

The amount of non-perovskite phases present in the ceramic may be such that the phases are non-discernible in an X-ray diffraction pattern. The amount of non-perovskite phases present in the ceramic may be a trace amount.

Preferably the total amount of non-perovskite phases present in the ceramic is less than 10wt%, particularly preferably less than 8wt%, more preferably less than 5wt%, yet more preferably less than 2wt%, still yet more preferably less than 1wt%, most preferably less than 0.1wt%.


The solid solution may be a partial solid solution. Preferably the solid solution is a complete solid solution.

The solid solution may be substantially monophasic.

The solid solution may be biphasic. Preferably the solid solution has two of the group consisting of a rhombohedral phase, a monoclinic phase, an orthorhombic phase and a tetragonal phase. The solid solution may have a rhombohedral phase and a monoclinic phase. The solid solution may have a rhombohedral phase and orthorhombic phase. Preferably the solid solution has a tetragonal phase and a rhombohedral phase.

Preferably $0 \leq z \leq 0.3$.

In a preferred embodiment, z is 0. Preferably in this embodiment the ceramic comprises (*eg* consists essentially of or consists of) a solid solution of formula:



wherein a is in the range 0.4 to 0.6 and x is in the range 0.01 to 0.99, wherein the ceramic is substantially free of non-perovskite phases.

The solid solution may be a solid solution of $(\text{Bi}_a\text{K}_{1-a})\text{TiO}_3$ in BiFeO_3 . The solid solution may be a solid solution of BiFeO_3 in $(\text{Bi}_a\text{K}_{1-a})\text{TiO}_3$.

Preferably x is in the range 0.1 to 0.9

Particularly preferably x is in the range 0.7 to 0.9. Particularly preferred in this range is a biphasic solid solution of a tetragonal and rhombohedral phase.

Particularly preferably x is in the range 0.1 to 0.4. The ceramics in this range exhibit a surprisingly high Curie point and are potentially useful in high temperature environments.

Particularly preferably x is in the range 0.5 to 0.6.

Preferably a is in the range 0.45 to 0.55. Particularly preferably a is in the range 0.48 to 0.52. More preferably a is 0.50.

In the solid solution, one or more of Bi, K, Fe and Ti may be substituted by a metal dopant. The metal dopant for each substitution may be the same or different. The presence of a metal dopant may significantly and unpredictably impact on the properties of the solid solution. For example, there may be an improvement in the Curie point and/or the piezoelectric activity.

The (or each) metal dopant may be present in an amount up to 50 at%, preferably up to 20 at%, particularly preferably up to 10 at%, more particularly preferably up to 5 at%, yet more preferably up to 3 at%, most preferably up to 1 at%.

The metal dopant may be an A-site metal dopant. For example, the A-site metal dopant may substitute Bi and/or K. Preferably the A-site metal dopant is selected from the group consisting of Li, Na, Ca, Sr, Ba and a rare earth metal.

The metal dopant may be a B-site metal dopant. For example, the B-site metal dopant may substitute Fe and/or Ti.

A preferred A-site metal dopant is Li or Na. The substitution of Li or Na on the A-site may modify (eg increase) the Curie point and/or favourably shift the phase composition of any biphasic solid solution (eg rhombohedral-tetragonal solid solution).

A preferred A-site metal dopant is Ca, Sr or Ba. The substitution of Ca, Sr or Ba on the A-site may reduce dielectric loss, modify (*eg* increase) the Curie point and/or favourably shift the phase composition of any biphasic solid solution (*eg* rhombohedral-tetragonal solid solution).

A preferred A-site metal dopant is a rare earth metal. A particularly preferred A-site metal dopant is La or Nd. Typically La or Nd substitute K. Substitution by La or Nd may increase the piezoelectric activity at the expense of the Curie point. By way of example (for a given BiFeO₃ concentration), substitution by La and Nd would typically reduce the Curie point by about 100-200°C and increase the piezoelectric activity by 50%.

In a particularly preferred embodiment, the A-site metal dopant is La (*eg* La³⁺) which substitutes K (*ie* K⁺). This substitution may improve significantly the resistivity.

A preferred B-site metal dopant has a higher valency than the valency of the metal which it substitutes. Conductivity in perovskites is usually attributable to electron holes or oxygen vacancies. Substituting a higher valence metal dopant onto a B-site may enhance appreciably the resistivity (*ie* suppress the conductivity).

In a particularly preferred embodiment, the B-site metal dopant has a valency in the range IV to VII. More particularly preferred is a B-site metal dopant selected from the group consisting of Ti, Zr, W, Nb, V, Ta, Mo and Mn. Yet more particularly preferred is a B-site metal dopant selected from the group consisting of Nb, Ta, Mo, W, Zr and V.

A preferred B-site metal dopant is selected from the group consisting of Ti, Fe, Co and Ni. Particularly preferred is Ti (*eg* Ti⁴⁺) which substitutes Fe (*ie* Fe³⁺).

In a preferred embodiment, the B-site metal dopant has a mixed valency. Substituting a mixed valency metal dopant onto a B-site may improve the resistivity significantly.

In a particularly preferred embodiment, the B-site metal dopant is Mn. An advantage of Mn is that it behaves as a buffer in the sense that it can adopt a range of oxidation states which can improve resistivity in a range of ceramics.

In a particularly preferred embodiment, the B-site metal dopant is Co. Typically Co substitutes Fe (*ie* Fe^{3+}).

The ceramic may take the form of a textured ceramic, a single crystal, a thin film or a composite (*eg* a ceramic/glass or ceramic/polymer composite).

Preferably the Curie point of the ceramic is 350 °C or more, particularly preferably 400 °C or more, more preferably 700 °C or more.

Preferably the ceramic has an X-ray diffraction pattern substantially as illustrated in Figure 2 or 7.

The ceramic may be obtainable by sintering a sinterable form of a mixed metal oxide containing Bi, K, Fe and Ti (and optionally Pb) to produce the ceramic.

Preferably the ceramic further comprises a pre-sintering additive.

The pre-sintering additive may be present in an amount of 75wt% or less, preferably 50wt% or less, particularly preferably 25wt% or less, more preferably 5wt% or less. The pre-sintering additive may be present in a trace amount.

The pre-sintering additive may be a perovskite. The pre-sintering additive may be a layered perovskite such as $\text{Bi}_4\text{Ti}_3\text{O}_{12}$. The pre-sintering additive may be a lead-containing perovskite. The lead-containing perovskite may be PbTiO_3 or PbZrO_3 .

The pre-sintering additive may be added post-reaction (*eg* post-calcination) to form the mixed metal oxide containing Bi, K, Fe and Ti (and optionally Pb). The pre-sintering additive may serve as a sintering aid.

In a preferred embodiment, the ceramic is obtainable by a process comprising:

(A) preparing an intimate mixture of a substantially stoichiometric amount of a compound of each of Bi, K, Ti and Fe (and optionally Pb);

(B) converting the intimate mixture into an intimate powder;

- (C) inducing a reaction in the intimate powder to produce a mixed metal oxide;
- (D) manipulating the mixed metal oxide into a sinterable form; and
- (E) sintering the sinterable form of the mixed metal oxide to produce the ceramic.

Viewed from a yet further aspect the present invention provides a process for preparing a ceramic as hereinbefore defined comprising:

- (A) preparing an intimate mixture of a substantially stoichiometric amount of a compound of each of Bi, K, Ti and Fe (and optionally Pb);
- (B) converting the intimate mixture into an intimate powder;
- (C) inducing a reaction in the intimate powder to produce a mixed metal oxide;
- (D) manipulating the mixed metal oxide into a sinterable form; and
- (E) sintering the sinterable form of the mixed metal oxide to produce the ceramic.

In step (A), it may be advantageous for one or more of the compounds of Fe, Ti, K and Bi (and optionally Pb) to depart from a stoichiometric amount. For example, one or more of Fe, Ti, K and Bi (and optionally Pb) is present in excess of the stoichiometric amount. For example, the atomic % may depart from stoichiometry by $\pm 20\%$ or less, preferably $\pm 10\%$ or less, particularly preferably $\pm 5\%$ or less. By departing from stoichiometry, the ceramic may be equipped advantageously with useful oxide phases (eg perovskite phases).

Preferably in step (A) the substantially stoichiometric amount of the compound of each of Bi, K, Ti and Fe (and optionally Pb) is expressed by the compositional formula:



wherein:

B is a B-site metal dopant as defined hereinbefore;

b is in the range 0.4 to 0.6;

c is in the range 0.4 to 0.6;

d is in the range 0 to 0.5; and

x, y and z are as hereinbefore defined.

In a particularly preferred embodiment, B is Ti.

In a particularly preferred embodiment, B is Co.

In a particularly preferred embodiment, d is in the range 0 to 0.2. More preferably d is zero.

In a particularly preferred embodiment, z is zero.

In a particularly preferred embodiment, b is a as hereinbefore defined and c is (1-a).

Step (A) may include a metal dopant oxide which delivers a metal dopant as hereinbefore defined.

The compound of each of Bi, K, Ti and Fe (and optionally Pb) may be independently selected from the group consisting of an oxide, nitrate, hydroxide, hydrogen carbonate, isopropoxide, polymer and carbonate, preferably an oxide and carbonate. Examples are Bi_2O_3 and K_2CO_3 .

The intimate mixture may be a slurry (*eg* a milled slurry), a solution (*eg* an aqueous solution), a suspension, a dispersion, a sol-gel or a molten flux.

Step (C) may include heating (*eg* calcining). Preferably step (C) includes stepwise or interval heating. Step (C) may include stepwise or interval cooling.

Where the intimate mixture is a solution, the compound may be a salt (*eg* a nitrate).

Where the intimate mixture is a sol-gel, the compound may be an isopropoxide.

Where the intimate mixture is a molten flux, the compound may be an oxide dissolved in a salt flux. The mixed metal oxide from step (C) may be precipitated out on cooling.

Preferably the intimate powder is a milled powder. Step (A) may be:

(A1) preparing a slurry of a substantially stoichiometric amount of a compound of each of Bi, K, Ti and K (and optionally Pb);

(A2) milling the slurry;

and step (B) may be

(B1) drying the slurry to produce the milled powder.

Step (E) may be stepwise or interval sintering. Preferably step (E) includes stepwise or interval heating and stepwise or interval cooling.

Step (E) may be carried out in the presence of a sintering aid. The presence of a sintering aid promotes densification. The sintering aid may be CuO_2 .

Step (D) may include milling the mixed metal oxide. Step (D) may include pelletising the mixed metal oxide.

Viewed from a still yet further aspect the present invention provides the use of a ceramic as hereinbefore defined in a piezoelectric device.

Preferably in the use according to the invention the piezoelectric device is operable at a temperature in excess of 400°C .

The piezoelectric device may be a piezoelectric actuator, sensor or transformer. For example the piezoelectric device may be an industrial steam sensor.

Preferably in the use according to the invention the piezoelectric device is deployed in an aero-engine.

The present invention will now be described in a non-limitative sense with reference to Examples and accompanying Figures in which:

Figure 1: A plot of theoretical density vs measured density of solid solutions $x\text{KBT}-1-x\text{BF}$ where $x=0.1$ to 0.9 ;

Figure 2: X-ray diffraction patterns of solid solutions $x\text{KBT}-1-x\text{BF}$ where $x=0.1$ to 0.6 ;

Figure 3: Permittivity vs temperature plots for solid solutions $x\text{KBT}-1-x\text{BF}$ where $x=0.4, 0.5$ and 0.6 ;

Figure 4: Curie point of solid solutions $x\text{KBT}-1-x\text{BF}$ as a function of composition;

Figure 5: Strain-field response for various solid solutions $x\text{KBT}-1-x\text{BF}$;

Figure 6: Room temperature dielectric constant of solid solutions $x\text{KBT}-1-x\text{BF}$ as a function of composition;

Figure 7: X-ray diffraction patterns for $0.6\text{BiFe}_{0.9}\text{Co}_{0.1}\text{O}_3-0.4\text{Bi}_{1/2}\text{K}_{1/2}\text{TiO}_3$ and $0.6\text{BiFe}_{0.8}\text{Co}_{0.2}\text{O}_3-0.4\text{Bi}_{1/2}\text{K}_{1/2}\text{TiO}_3$;

Figure 8: Strain-field plot for $0.6\text{BiFe}_{0.8}\text{Co}_{0.2}\text{O}_3-0.4\text{Bi}_{1/2}\text{K}_{1/2}\text{TiO}_3$;

Figure 9: X-ray diffraction patterns for (a) $0.475\text{BF}-0.45\text{KBT}-0.075\text{PT}$, (b) $0.55\text{BF}-0.3\text{KBT}-0.15\text{PT}$ and (c) $0.625\text{BF}-0.15\text{KBT}-0.225\text{PT}$;

Figure 10: Polarisation-field loop for $0.55\text{BF}-0.3\text{KBT}-0.15\text{PT}$ collected at 0.1 Hz and room temperature;

Figure 11: Bipolar strain-field loop for $0.55\text{BF}-0.3\text{KBT}-0.15\text{PT}$ collected at 0.1 Hz and room temperature;

Figure 12: Unipolar strain-field loop for $0.55\text{BF}-0.3\text{KBT}-0.15\text{PT}$ collected at 0.1 Hz and room temperature; and

Figure 13: Permittivity vs temperature plots for $0.55\text{BF}-0.3\text{KBT}-0.15\text{PT}$ (labelled 0.15PT) and $0.625\text{BF}-0.15\text{KBT}-0.225$ (labelled 0.225PT).

Example 1*Experimental Procedure*

A sample of the solid solution $x(\text{Bi}_a\text{K}_{1-a})\text{TiO}_3 - (1-x)\text{BiFeO}_3$ was synthesised using a mixed oxide process at each of nine compositions where $x=0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8$ and 0.9 respectively. The end point compositions where $x=0$ and $x=1$ were prepared for comparative purposes. The formal compositions were:

$x=0.1$	$0.9\text{BiFeO}_3 - 0.1(\text{Bi}_{0.5}\text{K}_{0.5})\text{TiO}_3$
$x=0.2$	$0.8\text{BiFeO}_3 - 0.2(\text{Bi}_{0.5}\text{K}_{0.5})\text{TiO}_3$
$x=0.3$	$0.7\text{BiFeO}_3 - 0.3(\text{Bi}_{0.5}\text{K}_{0.5})\text{TiO}_3$
$x=0.4$	$0.6\text{BiFeO}_3 - 0.4(\text{Bi}_{0.5}\text{K}_{0.5})\text{TiO}_3$
$x=0.5$	$0.5\text{BiFeO}_3 - 0.5(\text{Bi}_{0.5}\text{K}_{0.5})\text{TiO}_3$
$x=0.6$	$0.4\text{BiFeO}_3 - 0.6(\text{Bi}_{0.5}\text{K}_{0.5})\text{TiO}_3$
$x=0.7$	$0.3\text{BiFeO}_3 - 0.7(\text{Bi}_{0.5}\text{K}_{0.5})\text{TiO}_3$
$x=0.8$	$0.2\text{BiFeO}_3 - 0.8(\text{Bi}_{0.5}\text{K}_{0.5})\text{TiO}_3$
$x=0.9$	$0.1\text{BiFeO}_3 - 0.9(\text{Bi}_{0.5}\text{K}_{0.5})\text{TiO}_3$

The precursor powders (Bi_2O_3 , Fe_2O_3 , TiO_2 and K_2CO_3 99.9% purity, Sigma-Aldrich) were dried at 130°C for 24 hours in order to remove any moisture and to permit accurate weighing. The powders were weighed in the correct proportions to fabricate the target oxides listed above (see Table 1) and ball milled with yttria stabilised zirconia beads in 2-propanol for 17 hours. The resulting slurry was dried under heat lamps whilst stirring and sieved through 300 micron mesh nylon gauze.

Table 1

Composition (x)	Weight of Bi_2O_3 (g)	Weight of Fe_2O_3 (g)	Weight of K_2CO_3 (g)	Weight of TiO_2 (g)	Total Weight (g)	Total Weight - CO_2 (g)
0	148.593	51.047	0	0	200	200
0.1	145.837	47.349	2.277	5.263	200.725	200
0.2	142.524	43.417	4.697	10.858	201.496	200
0.3	138.995	39.229	7.275	16.818	202.317	200
0.4	135.228	34.758	10.0273	23.179	203.193	200
0.5	131.199	29.976	12.971	29.985	204.130	200
0.6	126.878	24.847	16.128	37.282	205.136	200
0.7	122.235	19.334	19.522	45.126	206.217	200
0.8	117.228	13.392	23.180	53.581	207.381	200
0.9	111.816	6.967	27.135	62.723	208.641	200
1.0	105.946	0	31.424	72.637	210.007	200

The mixture of dried, milled powders was calcined in covered alumina crucibles to induce a chemical reaction to produce the desired perovskite phase. The temperature programme for this step was: heat at 150 °C/hour to 800 °C, dwell at 800 °C for 4 hours and cool at 300 °C/hour to room temperature.

The powder was sieved through a 300 micron mesh and milled as described above. The powder was then made into pellets by loading 0.6g into a 10 mm die set to be pressed at 50 MPa.

Sintering temperatures of 850°C, 950°C, 975°C, 1000°C, 1040 °C and 1050°C were tried in order to achieve high density ceramics. Heating was carried out at 50 °C/hour to 600 °C and then at 300 °C/hour to the desired sintering temperature. Cooling from the sintering temperature was carried out at 150 °C/hour to 600 and then at 300 °C/hour to room temperature. A lower cooling rate was used in order to minimize thermal shock.

Prior to density, X-ray diffraction, electrical and electromechanical analyses, the sintered pellets were ground flat and parallel to nominally 1 mm thickness.

Results

The optimum sintering temperatures and resultant densities are shown in Table 2.

Table 2

Composition	Optimum sintering temperature / °C	Density / g cm ⁻³
$x=0.1$	975	7.5
$x=0.2$	975	7.2
$x=0.3$	1000	7.1
$x=0.4$	1000	6.4
$x=0.5$	1040	6.8
$x=0.6$	1025	6.4

The density is also shown in Figure 1 plotted against the theoretical density calculated from x-ray diffraction analysis.

X-ray diffraction analysis was carried out on the sintered pellets in order to confirm the crystal structure. The outcome of this analysis is shown in Figure 2. An interpretation of Figure 2 shows all the compositions to be a single phase of rhombohedral symmetry. There are no secondary, deleterious non-perovskite phases.

The Curie point is the temperature at which a ferroelectric material transforms to paraelectric. In the present $x\text{KBT}-1-x\text{BF}$ system, this occurs with the transition from a polar rhombohedral structure to a non-polar cubic structure and was measured by plotting the relative permittivity vs

temperature (see Figure 3). A maximum in the relative permittivity vs temperature curve denotes the Curie point. The Curie point of the compositions $x=0.1$ to 0.4 is such that no peak could be found using this technique (*ie* the Curie point is $> ca. 600\text{ }^{\circ}\text{C}$).

In order to determine the Curie point of the compositions $x=0.3$ and 0.4 , the crystal structure was studied as a function of temperature. This showed that the composition $x=0.3$ has a Curie point of $720\text{ }^{\circ}\text{C}$ and the composition $x=0.4$ has a Curie point of $700\text{ }^{\circ}\text{C}$.

From the known Curie point of BiFeO_3 , it is assumed that the Curie point for the compositions $x=0.1$ and 0.2 is between 720 and $820\text{ }^{\circ}\text{C}$. However at these temperatures, K_2O and Bi_2O_3 become volatile and the composition modifies. The data is shown in Figure 4.

The piezoelectric activity of the various compositions is shown in Figure 5. The composition $x=0.6$ exhibits the optimum piezoelectric activity.


When driven at the same drive field (7.5 kVmm^{-1}), the piezoelectric activity (defined as the maximum strain/maximum electric field) for each composition is shown in Table 3. No strain was generated for the composition $x=0.1$ at this electric field.


Table 3

Composition	Piezoelectric activity / pm V^{-1}
$x=0.6$	330
$x=0.5$	130
$x=0.4$	90
$x=0.3$	45
$x=0.2$	25
$x=0.1$	-

Figure 6 shows the room temperature dielectric constant as a function of composition.

Example 2





The precursor powders (Bi_2O_3 , Fe_2O_3 , TiO_2 , K_2CO_3 and CoO 99.9% purity, Sigma-Aldrich) were dried at 130°C for 24 hours in order to remove any moisture and to permit accurate weighing. The powders were weighed in the correct proportions to fabricate the target oxides listed below (see Table 4) and ball milled with yttria stabilised zirconia beads in 2-propanol for 17 hours. The resulting slurry was dried under heat lamps whilst stirring and sieved through 300 micron mesh nylon gauze.

Table 4

Composition (y)	Weight of Bi_2O_3 (g)	Weight of Fe_2O_3 (g)	Weight of K_2CO_3 (g)	Weight of TiO_2 (g)	Weight of CoO (g)	Total Weight (g)	Total Weight - CO_2 (g)
0.05 (5% Cobalt)	126.928	23.614	16.135	37.295	1.167	205.1378	200
0.10 (10% Cobalt)	126.976	22.380	16.140	37.309	2.334	205.140	200
0.2 (20% Cobalt)	127.074	19.908	16.153	37.338	4.671	205.1437	200

The mixtures of dried, milled powders were calcined in covered alumina crucibles to induce a chemical reaction to produce the desired perovskite phase. The temperature programme for this step was: heat at $150^\circ\text{C}/\text{hour}$ to 800°C for 4 hours and to cool at $300^\circ\text{C}/\text{hour}$ to room temperature.

The powder was again sieved through a $300\ \mu\text{m}$ mesh and milled as described above with 1 wt% Glascol HA40 binder and sieved a final time. The powder was then fabricated into pellets by

loading 0.6 g into a 10mm diameter die and pressed at 30 MPa for 5 minutes. The pellets were then cold isostatic pressed for five minutes at 350 MPa.

Sintering temperatures of 1000 °C and 1025 °C were attempted in order to obtain high density ceramics. The sintering regime was as follows: 50 °C/hour to 600 °C and then at 300 °C/hour to the sintering temperatures outlined above. Cooling from the sintering temperature was carried out at 150 °C/hour to 600 °C and then at 300 °C/hour to room temperature. Cooling rates were lower to minimize thermal shock.

Prior to density and X-ray diffraction analysis, the pellets were ground flat and parallel to 1mm in thickness.

Prior to electrical testing such as strain field loops and permittivity ν temperature analysis, the pellets were ground flat and parallel to 0.3 mm.

Results

Figure 7 shows X-ray diffraction patterns for $0.6\text{BiFe}_{0.9}\text{Co}_{0.1}\text{O}_3 - 0.4\text{Bi}_{1/2}\text{K}_{1/2}\text{TiO}_3$ and $0.6\text{BiFe}_{0.8}\text{Co}_{0.2}\text{O}_3 - 0.4\text{Bi}_{1/2}\text{K}_{1/2}\text{TiO}_3$. The patterns are single phase perovskite and showed no secondary non-perovskite phases.

The strain/electric field response for composition $x=0.6$, $y=0.2$ is shown in Figure 8. Using an applied electric field of 4 kV mm^{-1} , a strain of 0.44% was generated with a high field $d_{33} = 1100 \text{ pm V}^{-1}$ which is far higher than is observed in PZT.

Example 3

A sample of the solid solution $x(\text{Bi}_a\text{K}_{1-a})\text{TiO}_3 - y(\text{BiFeO}_3) - (1-x-y)\text{PbTiO}_3$ was synthesised using the mixed oxide process described in the previous Examples at each of the following compositions

0.475BF-0.45KBT-0.075PT

0.55BF-0.3KBT-0.15PT

0.625BF-0.15KBT-0.225PT

The powders were weighed in the correct proportions to fabricate these target oxides (see Table 5).

Table 5

Composition	Weight of Bi_2O_3 (g)	Weight of Fe_2O_3 (g)	Weight of K_2CO_3 (g)	Weight of TiO_2 (g)	Weight of PbO (g)	Total Weight (g)	Total Weight - CO_2 (g)
0.475BF-0.45KBT-0.075PT	120.680	28.064	11.505	31.027	12.387	203.663	200
0.55BF-0.3KBT-0.15PT	115.058	30.982	7.313	25.356	23.620	202.329	200
0.625 BF-0.15KBT-0.225PT	109.937	33.640	3.494	20.189	33.853	201.113	200

X-ray diffraction data are given in Figure 9.

Results

Table 6 shows density and sintering temperature for the three compositions.

Table 6

Composition	Sintering Temp ($^{\circ}\text{C}$)	Density (kg/m^3)	T_c ($^{\circ}\text{C}$)
0.475BF-0.45KBT0.075PT	1045	7000	-
0.55 BF- 0.3 KBT- 0.15 PT	1035	7250	525
0.625 BF-0.15 KBT-0.225	1025	7300	590

Figure 10 is a polarisation-field loop for 0.55 BF- 0.3 KBT- 0.15 PT collected at 0.1 Hz and room temperature. The remnant polarisation and coercive field are similar to that observed in PZT.

Figure 11 is a bipolar strain-field loop for 0.55 BF- 0.3 KBT- 0.15 PT collected at 0.1 Hz and room temperature. The total peak to peak strain is $> 0.7\%$.

Figure 12 is a unipolar strain-field loop for 0.55 BF- 0.3 KBT- 0.15 PT collected at 0.1 Hz and room temperature. The total strain exceeds 0.43% at 7.5 kV/mm . The high field d_{33} (max strain / max field) is 575 pmV^{-1} .


Figure 13 illustrates permittivity vs temperature plots for 0.55 BF- 0.3 KBT- 0.15 PT (labelled 0.15PT) and 0.625 BF-0.15 KBT-0.225 (labelled 0.225PT). From the maximum in dielectric constant, the inferred ferroelectric – paraelectric transition temperatures are 520°C and 590°C respectively. The data was collected on cooling from high temperature at a frequency of 100 kHz .

Summary

The composition 0.55 BF- 0.3 KBT- 0.15 PT exhibits a high field d_{33} of 575 pm V^{-1} which is higher than most hard commercial PZT materials and a T_C of 525 (PZT max = 350). In addition, the density is lower than that of PZT (typically 7700 to 7900) which may be useful for some applications. The total strain (both bipolar and Unipolar) exceeds that exhibited by conventional PZT based materials.

CLAIMS

1. A ceramic comprising a solid solution of formula:



wherein $0.4 \leq a \leq 0.6$;

$0 < x < 1$;

$0 < y < 1$;


$0 \leq z \leq 0.5$; and

$x + y + z = 1$,

wherein the ceramic is substantially free of non-perovskite phases.

2. A ceramic as claimed in claim 1 wherein $0 \leq z \leq 0.3$.

3. A ceramic as claimed in claim 1 or 2 comprising a solid solution of formula:



wherein a is in the range 0.4 to 0.6 and x is in the range 0.01 to 0.99, wherein the ceramic is substantially free of non-perovskite phases.

4. A ceramic as claimed in any preceding claim further comprising one or more perovskite phases selected from the group consisting of $(\text{Bi}_a\text{K}_{1-a})\text{TiO}_3$, BiTiO_3 , KTiO_3 , BiFeO_3 and PbTiO_3 .

5. A ceramic as claimed in any preceding claim wherein the solid solution has two of the group consisting of a rhombohedral phase, a monoclinic phase, an orthorhombic phase and a tetragonal phase.

6. A ceramic as claimed in any preceding claim wherein x is in the range 0.7 to 0.9.

7. A ceramic as claimed in any of claims 1 to 5 wherein x is in the range 0.1 to 0.4.
8. A ceramic as claimed in any of claims 1 to 5 wherein x is in the range 0.5 to 0.6.
9. A ceramic as claimed in any preceding claim wherein a is 0.50.
10. A ceramic as claimed in any preceding claim wherein in the solid solution, Bi and/or K are substituted by an A-site metal dopant selected from the group consisting of Li, Na, Ca, Sr, Ba and a rare earth metal.
11. A ceramic as claimed in any preceding claim wherein in the solid solution, Fe and/or Ti are substituted by a B-site metal dopant which has a higher valency than the valency of the metal which it substitutes or has a mixed valency.
12. A ceramic as claimed in any preceding claim wherein in the solid solution, Fe and/or Ti are substituted by a B-site metal dopant selected from the group consisting of Ti, Zr, W, Nb, V, Ta, Mo and Mn.
13. A ceramic as claimed in any preceding claim wherein in the solid solution, Fe and/or Ti are substituted by a B-site metal dopant selected from the group consisting of Ti, Fe, Co and Ni.
14. A ceramic as claimed in any preceding claim obtainable by a process comprising:
 - (A) preparing an intimate mixture of a substantially stoichiometric amount of a compound of each of Bi, K, Ti and Fe (and optionally Pb);
 - (B) converting the intimate mixture into an intimate powder;
 - (C) inducing a reaction in the intimate powder to produce a mixed metal oxide;
 - (D) manipulating the mixed metal oxide into a sinterable form; and
 - (E) sintering the sinterable form of the mixed metal oxide to produce the ceramic.
15. A process for preparing a ceramic as defined in any preceding claim comprising:

(A) preparing an intimate mixture of a substantially stoichiometric amount of a compound of each of Bi, K, Ti and Fe (and optionally Pb);

(B) converting the intimate mixture into an intimate powder;

(C) inducing a reaction in the intimate powder to produce a mixed metal oxide;

(D) manipulating the mixed metal oxide into a sinterable form; and

(E) sintering the sinterable form of the mixed metal oxide to produce the ceramic.

16. A process as claimed in claim 15 wherein in step (A) the substantially stoichiometric amount of the compound of each of Bi, K, Ti and Fe (and optionally Pb) is expressed by the compositional formula:



wherein:

B is a B-site metal dopant;

b is in the range 0.4 to 0.6;

c is in the range 0.4 to 0.6;

d is in the range 0 to 0.5; and

x, y and z are as defined in any preceding claim.

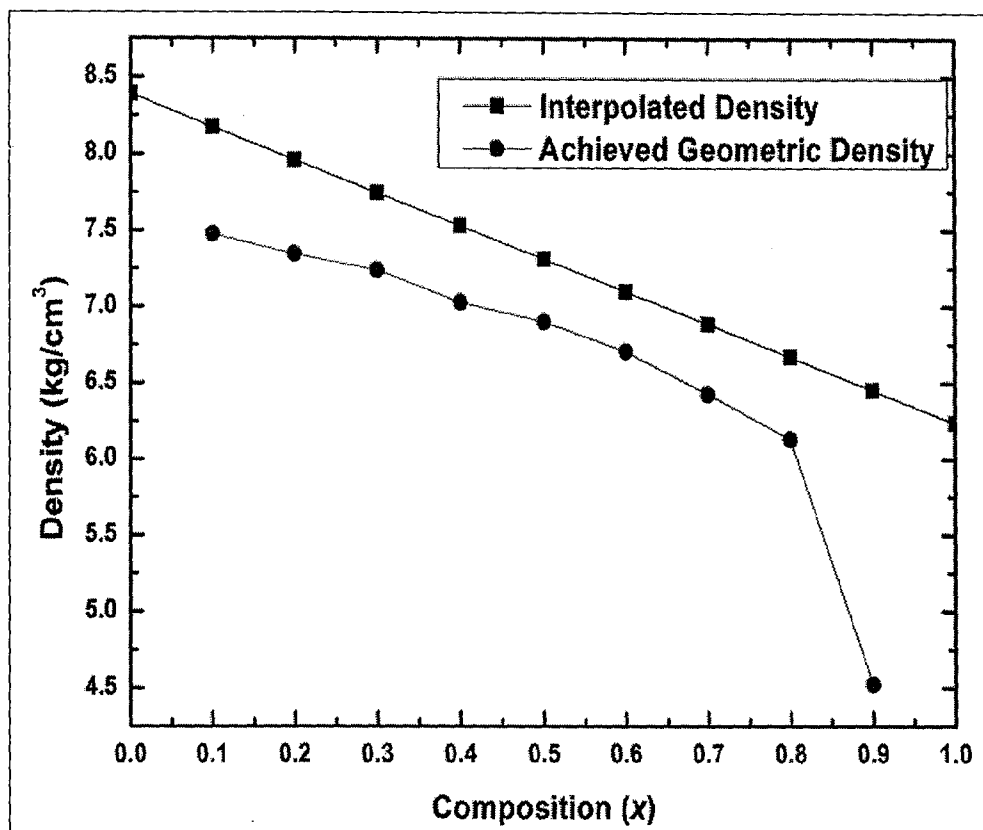


Figure 1

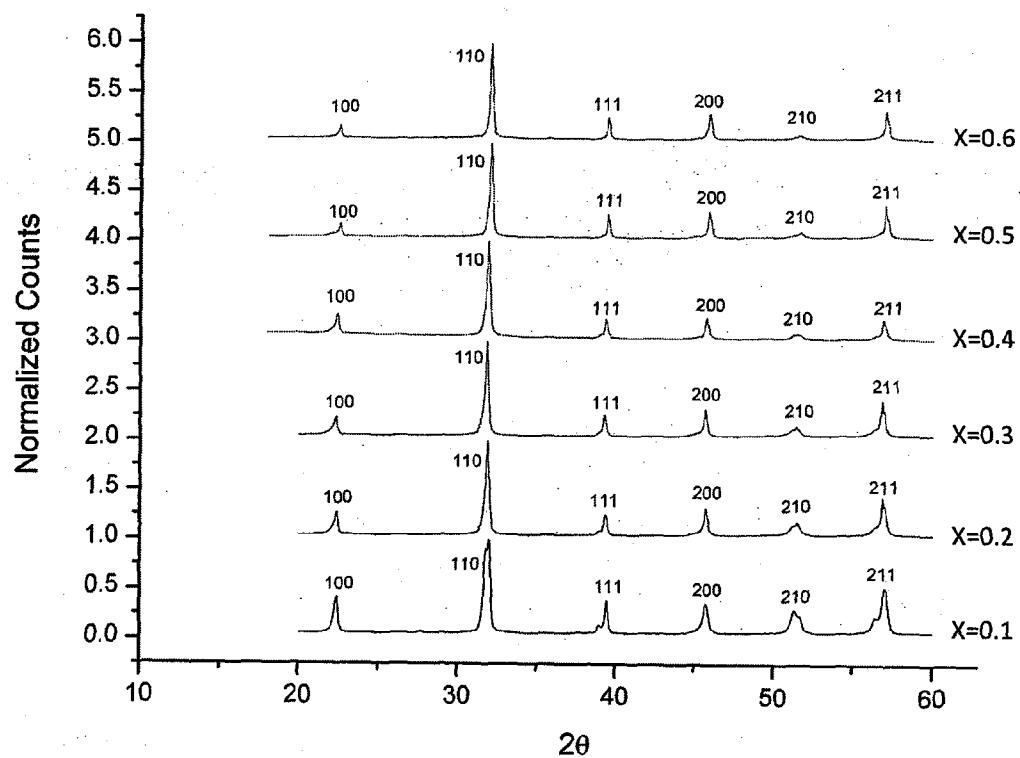


Figure 2

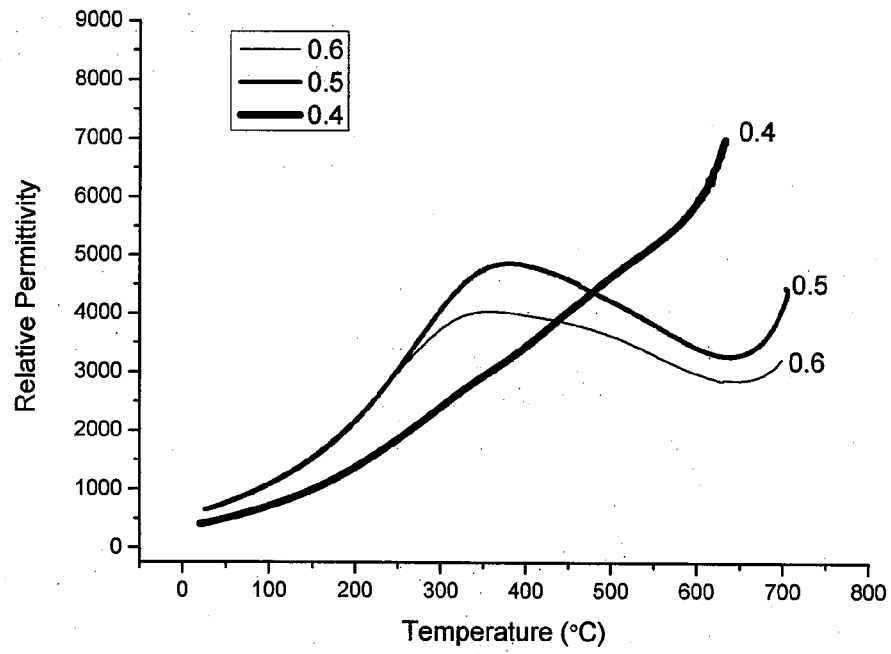
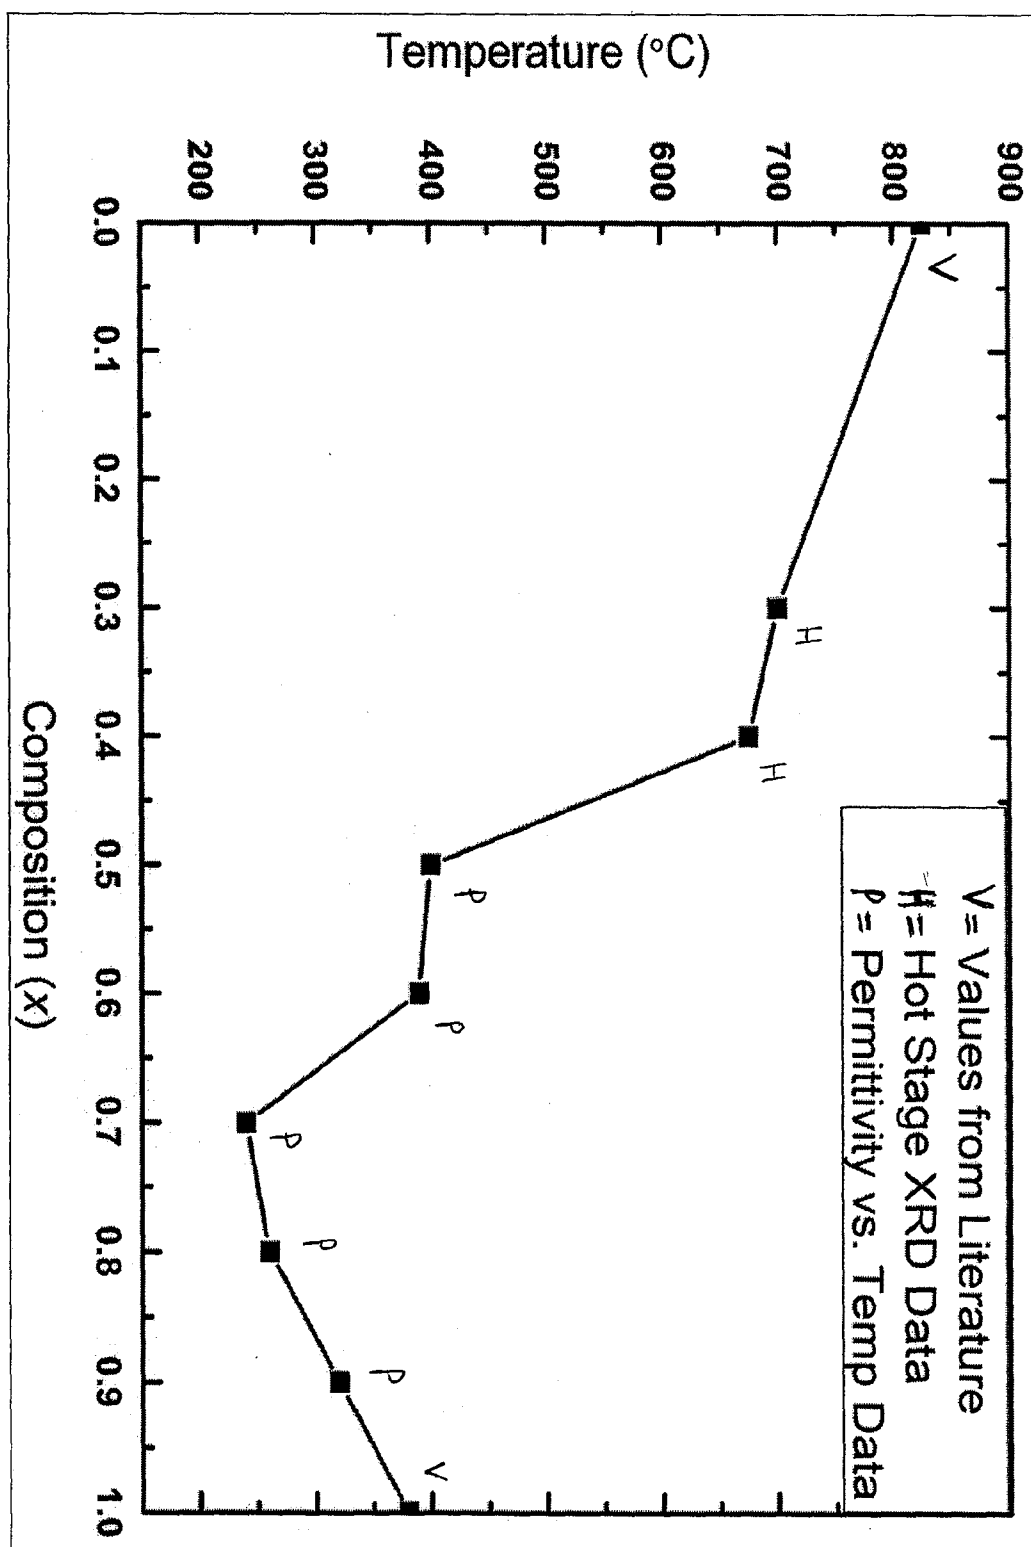


Figure 3

Figure 4



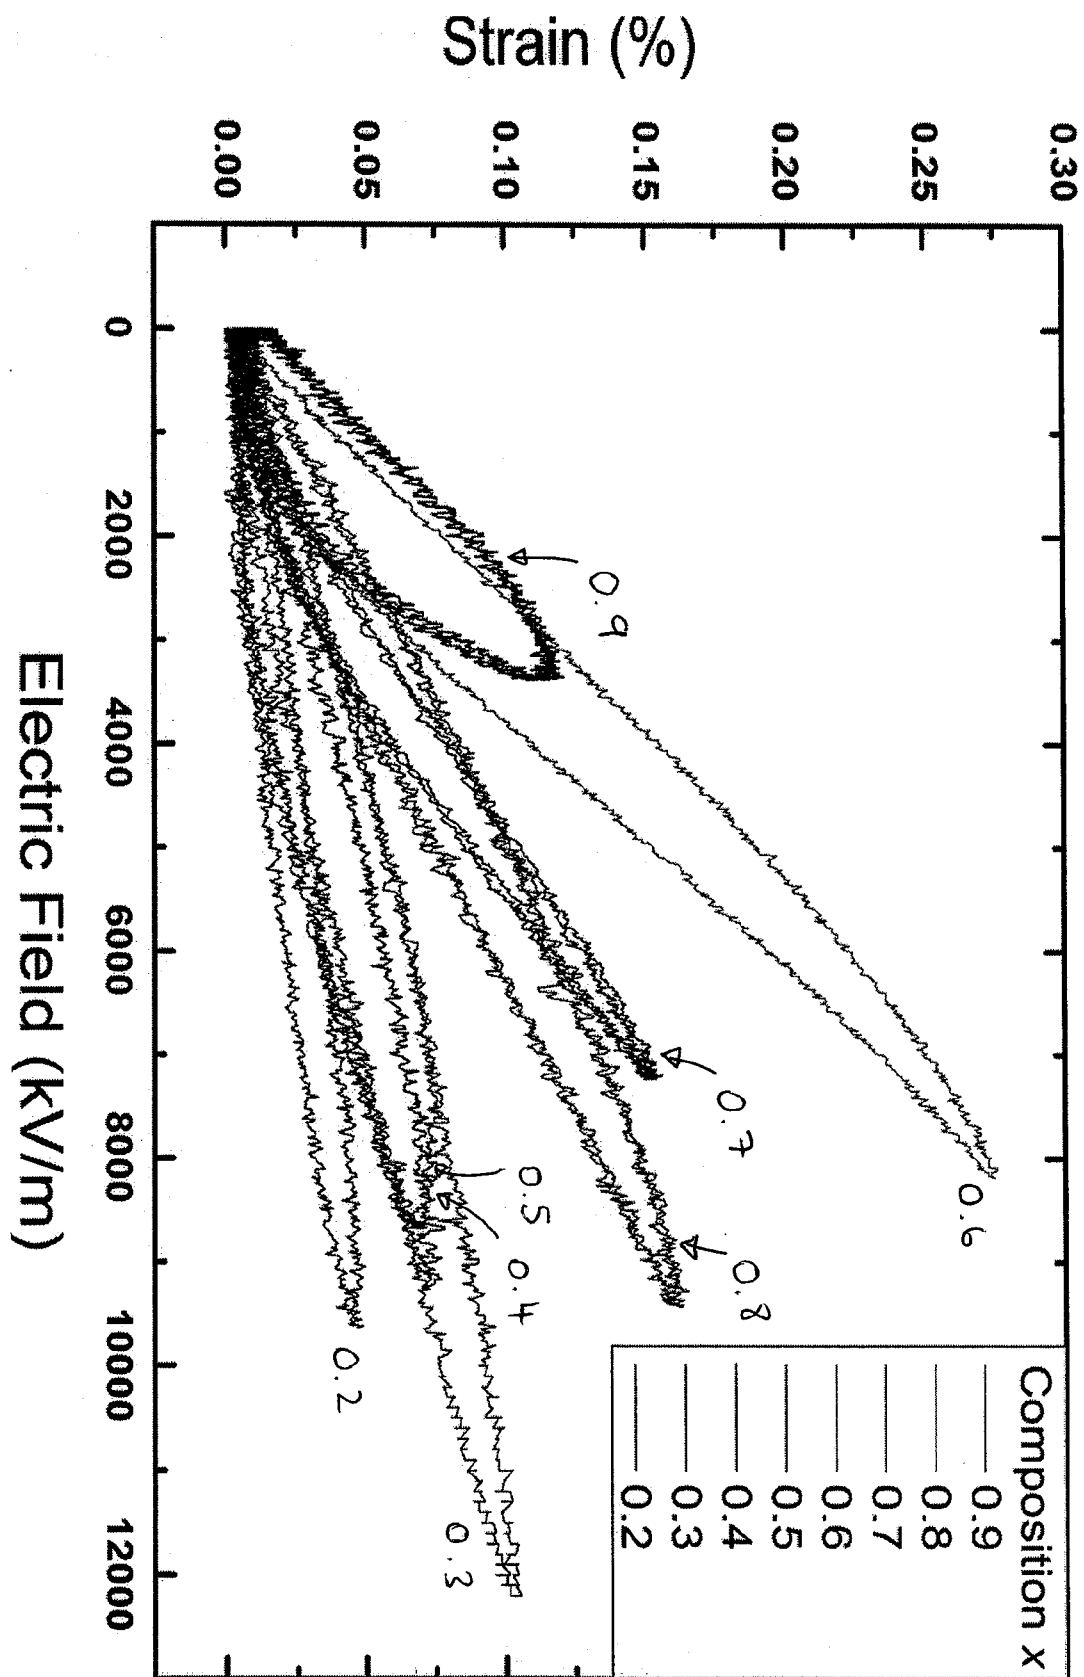


Figure 5

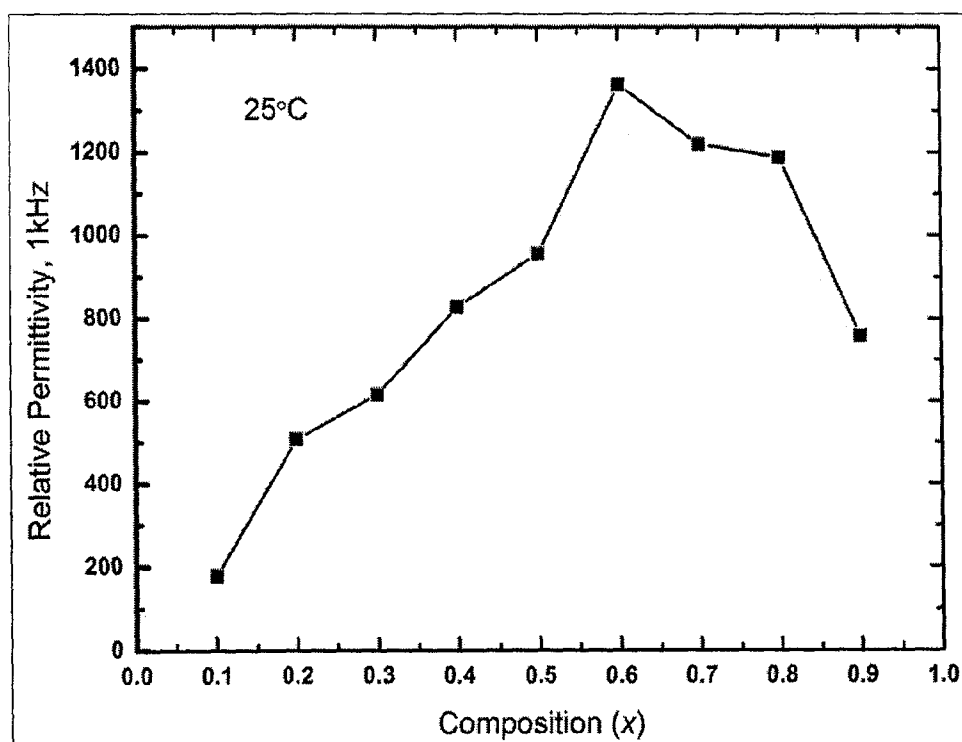


Figure 6

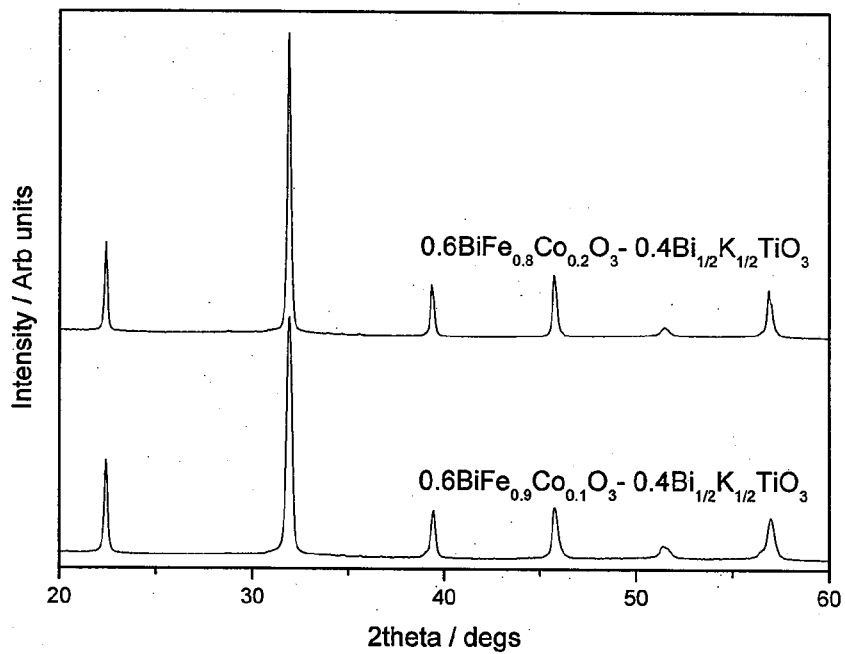


Figure 7

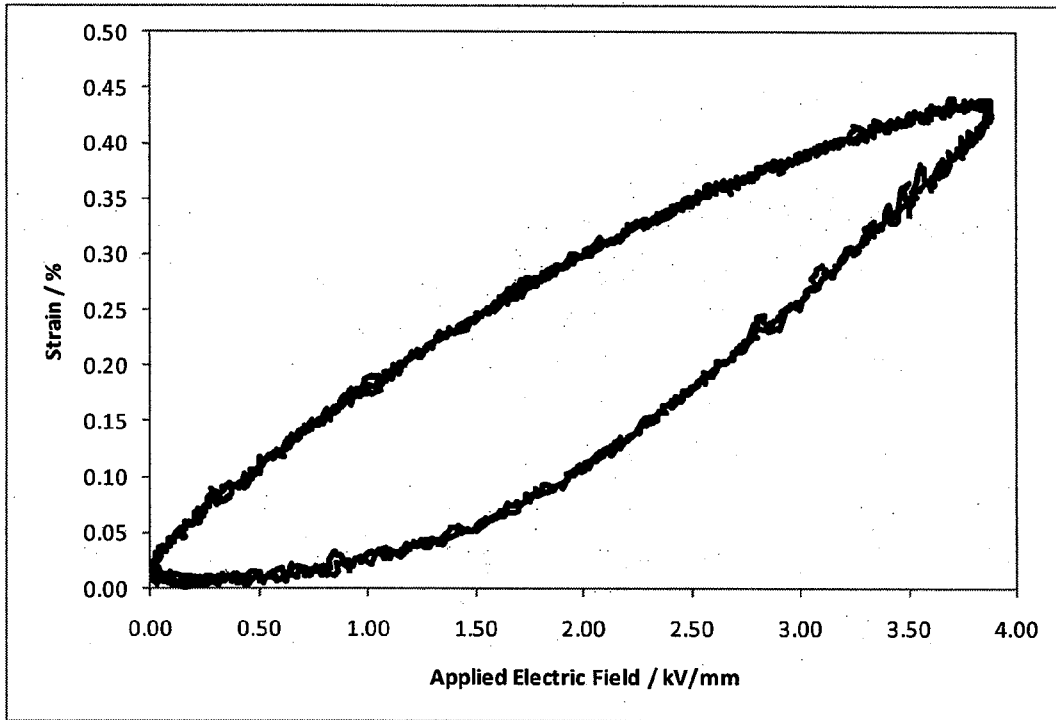
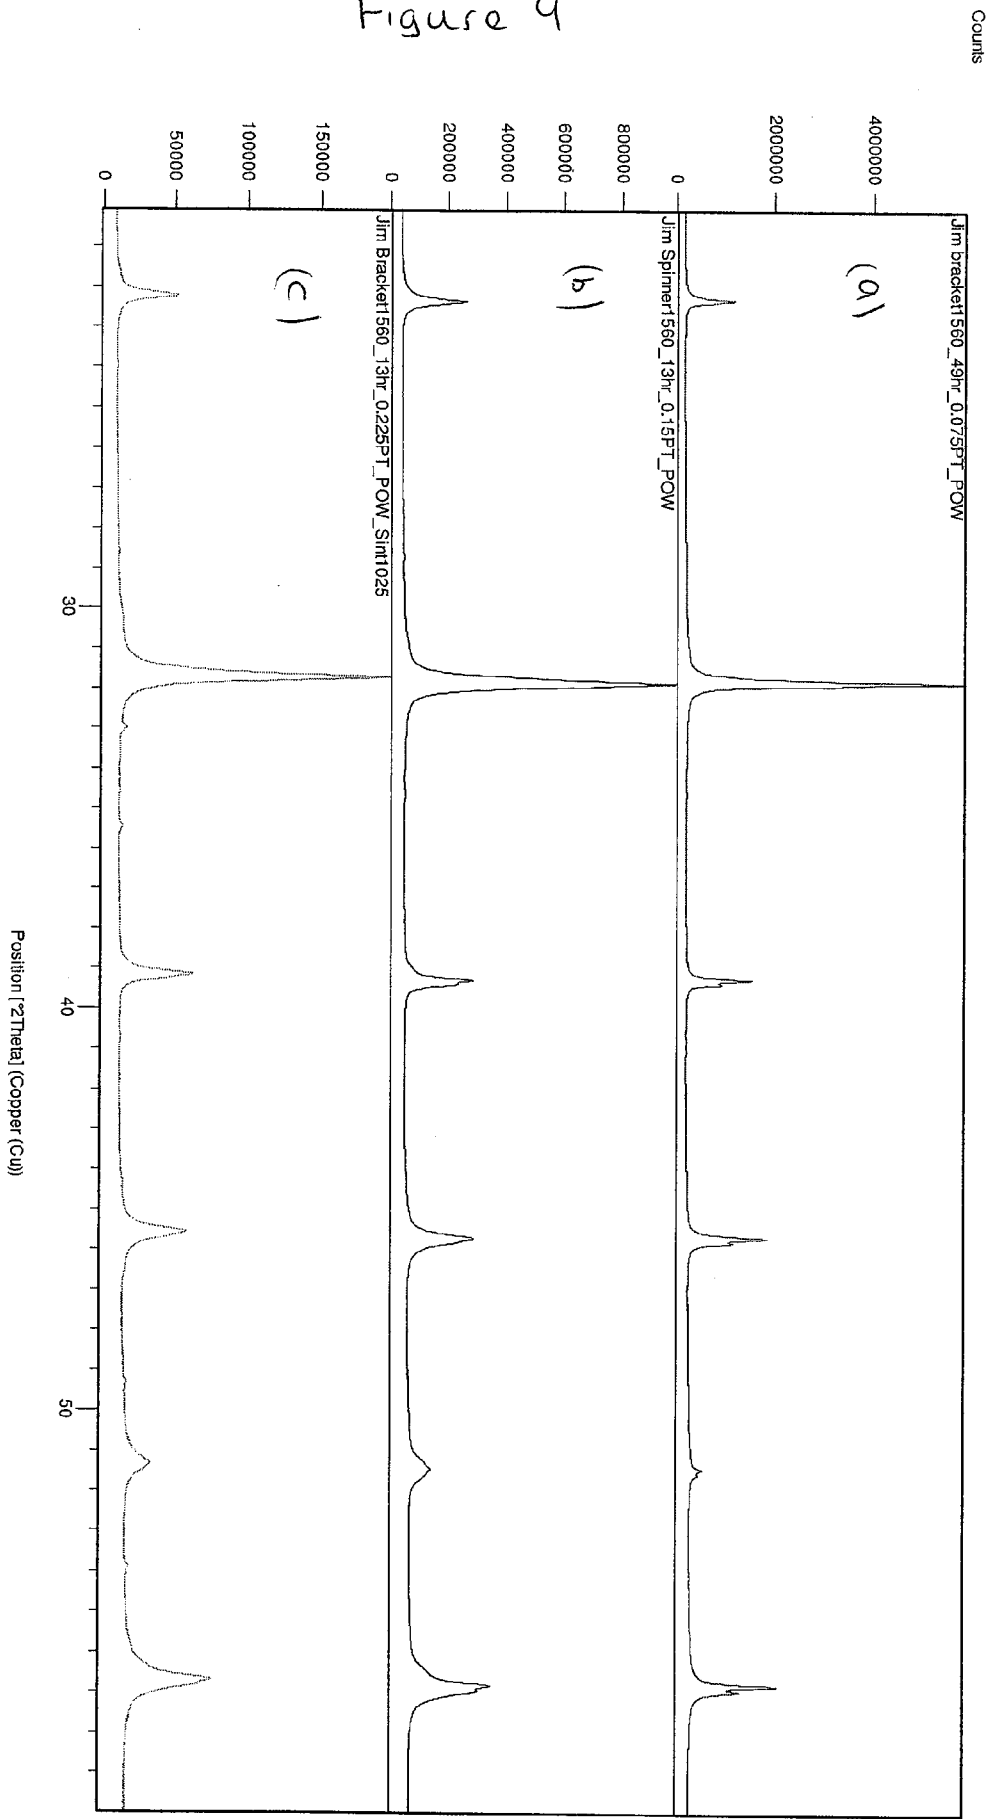


Figure 8

Figure 9



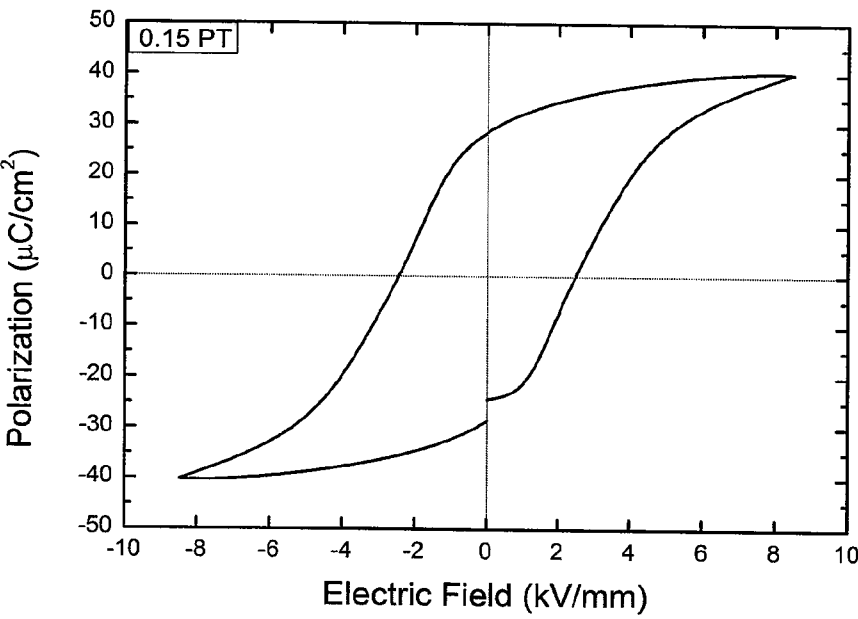


Figure 10

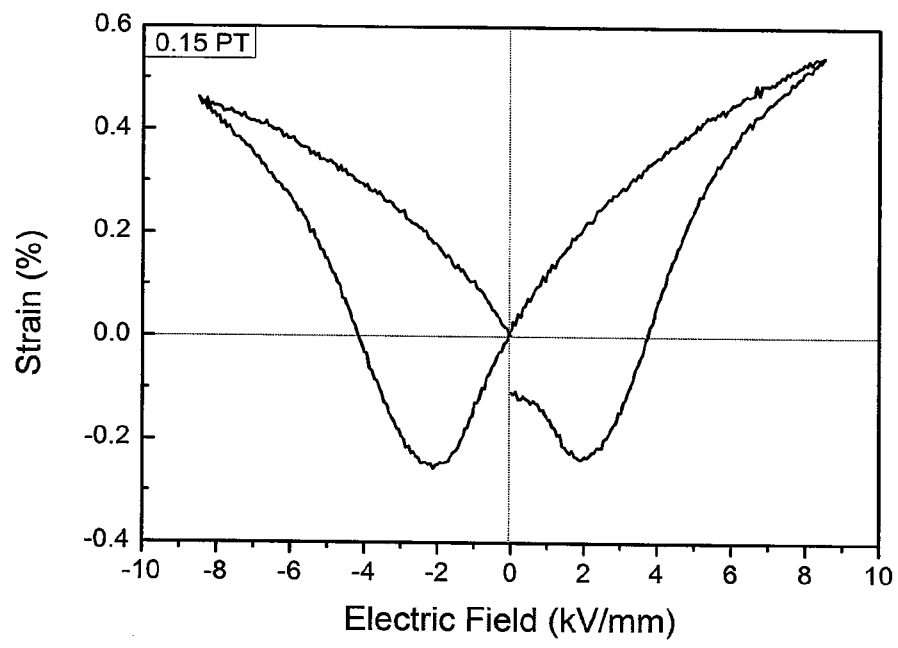


Figure 11

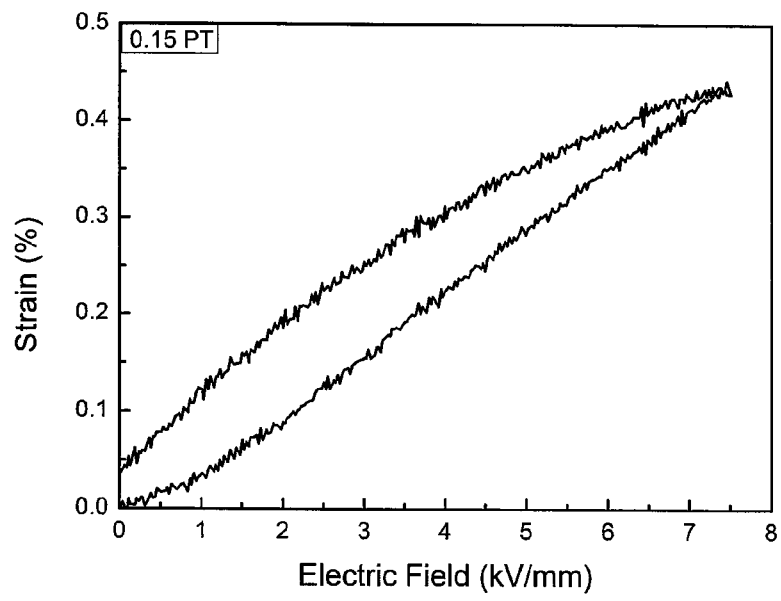


Figure 12

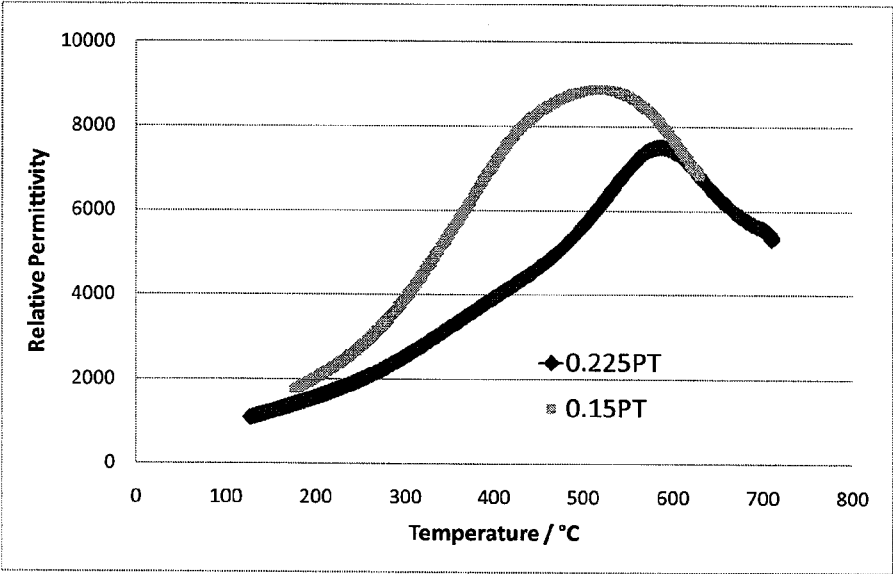


Figure 13

INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2011/051356

A. CLASSIFICATION OF SUBJECT MATTER

INV. C04B35/26 C04B35/462 C04B35/475 H01L41/187 H01L41/24
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C04B H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2010 126421 A (SEIKO EPSON CORP) 10 June 2010 (2010-06-10)	1-5,7-9, 14-16
Y	paragraph [0020] - paragraph [0045]; figure 3; examples 1-2 -----	10-13
X	JP 2008 069051 A (HOSOKAWA FUNTAI GIJUTSU KENKYU; UNIV TOKYO) 27 March 2008 (2008-03-27)	1-9, 14-16
Y	cited in the application paragraph [0017]; examples 1-4 -----	10-13
X,P	WO 2010/114148 A1 (CANON KK [JP]; UNIV YAMANASHI [JP]; SAITO HIROSHI [JP]; MATSUDA TAKANO) 7 October 2010 (2010-10-07) page 8, line 13 - line 22 page 10, line 26 - page 19, line 22 ----- -/--	1-9, 14-16



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 September 2011

Date of mailing of the international search report

29/09/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Bonneau, Sébastien

INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2011/051356

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	ELENA AKSEL ET AL: "Advances in Lead-Free Piezoelectric Materials for Sensors and Actuators", SENSORS, vol. 10, no. 3, 10 March 2010 (2010-03-10) , pages 1935-1954, XP55006962, ISSN: 1424-8220, DOI: 10.3390/s100301935 Chapter 7. Summary, page 1948; page 1941; table A1 -----	10-13
A	TAKENAKA T ET AL: "Phase Transition Temperatures and Piezoelectric Properties of (Bi 1/2 Na 1/2)TiO 3 -and (Bi 1/2 K 1/2)TiO 3 -Based Bismuth Perovskite Lead-Free Ferroelectric Ceramics", IEEE TRANSACTIONS ON ULTRASONICS, FERROELECTRICS AND FREQUENCY CONTROL, IEEE, US, vol. 56, no. 8, 1 August 2009 (2009-08-01) , pages 1595-1612, XP011271280, ISSN: 0885-3010, DOI: 10.1109/TUFFC.2009.1224 the whole document -----	1-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2011/051356

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2010126421 A	10-06-2010	NONE	
JP 2008069051 A	27-03-2008	NONE	
WO 2010114148 A1	07-10-2010	JP 2010254560 A	11-11-2010